KAMAMI

KAmodQTR8A

Rev. 20241101184010
Źródło: https://wiki.kamamilabs.com/index.php?title=KAmodQTR8A

Table of contents

Basic features and parameters 1
Standard equipment 2
Electrical schematic 3
View of PCB 4
Module power supply and signal outputs 5
Detachable module with two sensors 6
Power supply with voltage 3.3V 7
Principle of KAmodQTR8A module operation 8
External links 9

Description

KAmodQTR8A is a module with eight photointerrupter sensors KTIR0711S. It allows to detect edge or line. Thanks to the analog outputs, is possible to connect a module to the e.g. comparator. The module can be used in analisze of the floor e.g. by Linefollower vehicles.

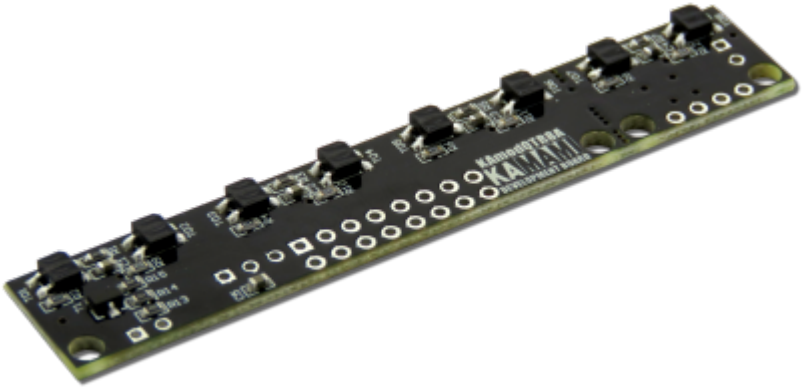

Basic features and parameters

- Photointerrupter type KTIR0711S
- Embedded 8 sensors
- Recommended distance to the floor: 6mm
- Blackout of the sensor is signalizing with voltage close to the zero
- Possibility of cutting a board with two sensor and using it in other application
- Transistor to the IR emitter control allows to e.g. introducing of the modulation
- Power supply voltage: 5V
- Power consumption: 90mA
- Possibility of power supply with 3.3V (BYPASS jumper is needed)
- Holes for headers soldering
- Mounting holes 3mm
- Module size (without connectors): 75mm x 13mm x 3.2mm

Standard equipment

Code	Description
KAmodQTR8A	• Assembled and launched module • 2x straight male headers (2 pin) for soldering • Straight male headers (3 pin) for soldering • Straight male headers (4 pin) for soldering • Straight male dual headers (2 x 8 pin) for soldering

Electrical schematic

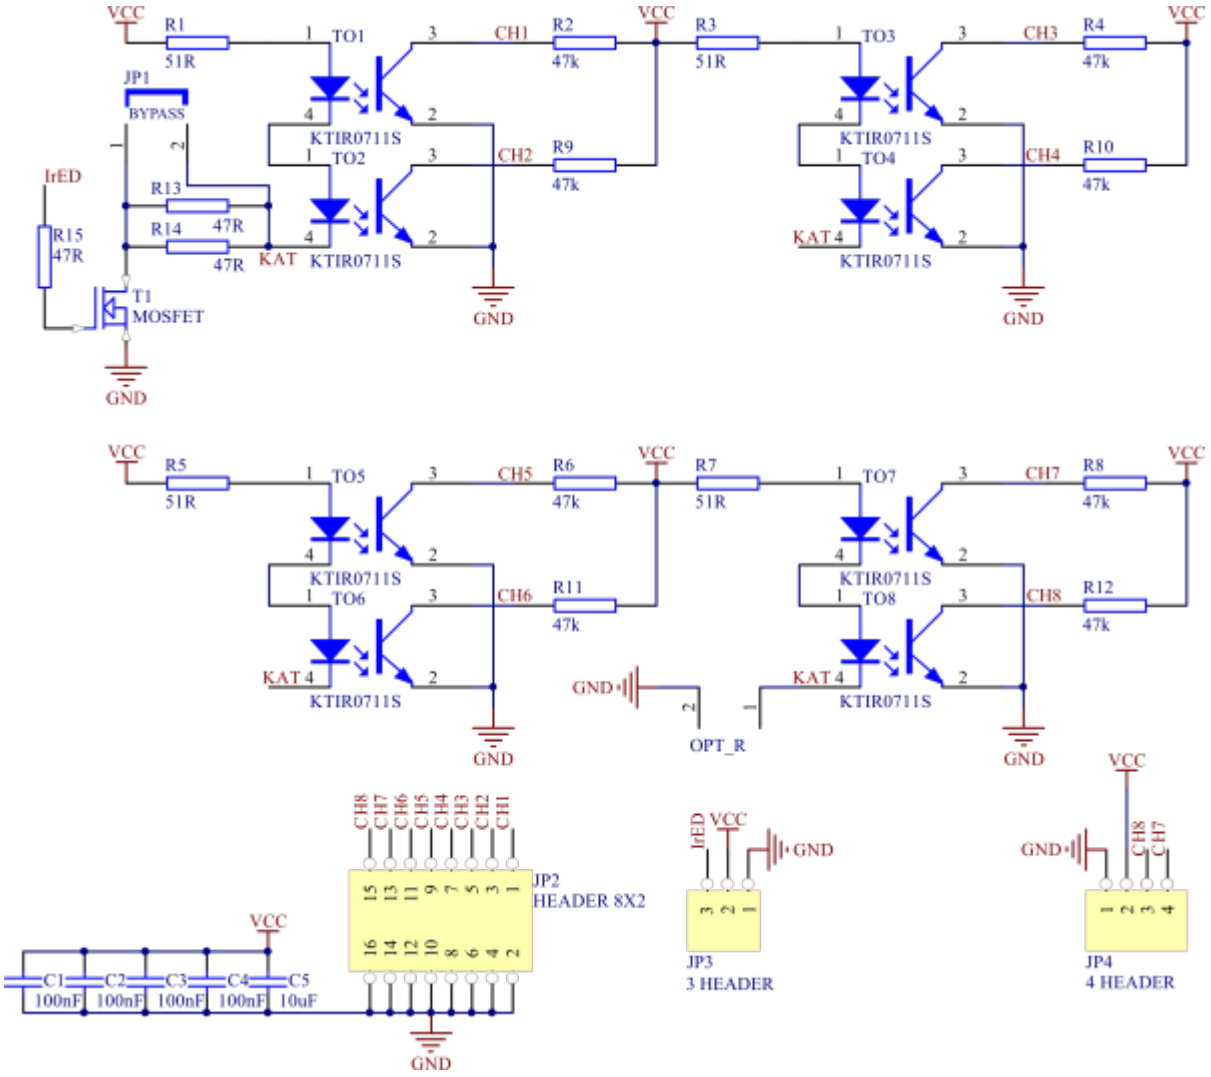

View of PCB

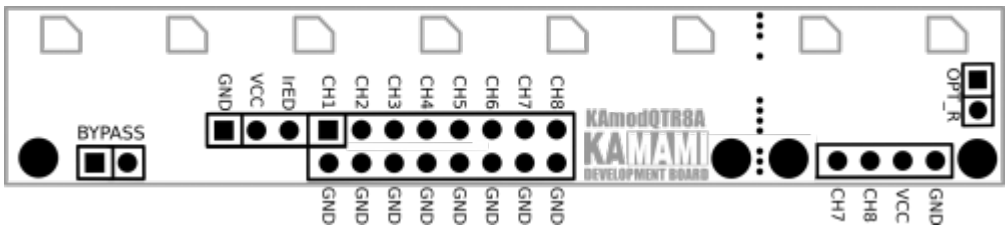
BYPASS
GND
VCC
IrED
CH1
CH2
CH3
CH4
CH5
CH6
CH7
CH8
GND
GND
GND
GND
GND
GND
GND
GND
KAmodQTR8A
KAMAMI
DEVELOPMENT BOARD
OPT_R
CH7
CH8
VCC
GND

Module power supply and signal outputs

Power supply with a voltage 5V should be connected to the JP3 (VCC, GND) header. By using IrED line can be enabling and disabling LED IR emitters. On outputs CH1...CH8 are extended analog signals from KTIR0711S photointerrupter (by lack of the reflection from the floor, voltage on output is close to power supply voltage).

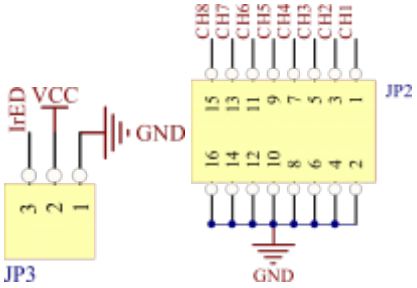

JP2/JP3	Function
GND	Ground of the module
VCC	Power supply of the module
IrED	Control signal of IR diode (active by high state)
CH1...CH8	Analog output signals from photointerrupters

Detachable module with two sensors

KAmodQTR8A module allows to safety cutting of two sensors (7 and 8 channel) and using in other application. Power supply and output singals are placed on JP4 connectors in this case. In disconnected module should be closed OPT_R connector with a jumper (to the working with 3.3V) or soldered 100Ω resistor (to power supply 5V).

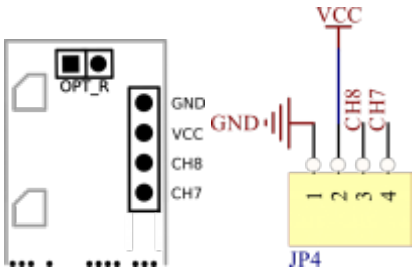

Power supply with voltage 3.3V

By using 3.3V as a power supply voltage should be closed BYPASS connector with a jumper.

Principle of KAmodQTR8A module operation

KAmodQTR8A module allow to research of the floor or detect obstacles, which are in rage of working. Eight photointerrupters allow to precise analyzing of the direction in which obstacle or object move (e.g. follow the line in Linefollower vehicles). KTIR0711S sensors (used in module) consist of IR emitter and phototransistor which can react to infrared light. Output of each sensor is an analog signal. Value of the signal depends on amount of reflective light from emitter. In normal state (without reflection) is voltage close to power supply voltage. In case of detection of the reflection on one of the module channel, output voltage of this channel fall close to zero.

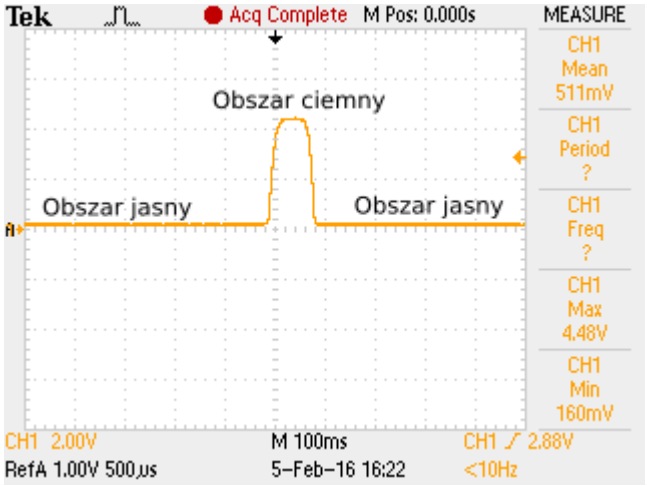

External links

- KTIR0711S datasheet
- (PROJECT) KAmodQTR8A + KAmduino UNO – line detection for Linefollower robots

BTC Korporacja
05-120 Legionowo
ul. Lwowska 5
tel.: (22) 767-36-20
faks: (22) 767-36-33
e-mail:
sprzedaz@kamami.pl
https://kamami.pl

Zastrzegamy prawo do wprowadzania zmian bez uprzedzenia.
Oferowane przez nas płytki drukowane mogą się różnić od prezentowanej w dokumentacji, przy czym zmianom nie ulegają jej właściwości użytkowe.
BTC Korporacja gwarantuje zgodność produktu ze specyfikacją.
BTC Korporacja nie ponosi odpowiedzialności za jakiekolwiek szkody powstałe bezpośrednio lub pośrednio w wyniku użycia lub nieprawidłowego działania produktu.
BTC Korporacja zastrzega sobie prawo do modyfikacji niniejszej dokumentacji bez uprzedzenia.